

SEAHAWK LEAK DETECTION ACCESSORIES



SeaHawk Non-Sensing Cable (NSC) is used to extend a control panel's leader cable to an area where sensing cable is needed. It also bridges lengths of SeaHawk Water Leak Detection Cable (SC) in areas where sensing is not required. Invisible to the control panel, NSC does not affect the accuracy of readings, or limit the amount of sensing cable that can be connected to a control panel.

Like SeaHawk Water Leak Detection Cable (SC), NSC is highly flexible, resists bends and kinks, lies flat after installation, and is abrasion resistant. The cable is plenum rated and UL listed making it ideal for use under raised-floors and areas where plenum rated cable is required.

Both ends of the NSC have the same mating connectors used on SC, making integration, installation and replacement quick and easy. Multiple cables can be connected end-to-end for additional length. NSC is sold in pre-measured or custom lengths, with end connectors pre-installed.

NSC is commonly used in combination with SC and SeaHawk leak detection systems in critical spaces such as data centers, clean rooms, telecommunication centers and record storage areas.

Key Features & Benefits


- Cost-effectively extends a leader cable, and bridges areas requiring sensing cable with those not requiring it
- Thermally bonded polymer-coated carrier increases strength and durability
- Strong, durable, and abrasion resistant
- Mating end connectors for easy expansion
- Highly flexible so it lies flat after installation
- Resists bends and kinks making installation quick and simple
- Available in standard and custom lengths with pre-installed end connectors; bulk quantities also available
- Plenum rated and UL listed
- RoHS compliant

Specifications

Plenum Rating	CL20/CMP C(UL)
Sheer Strength	>180 lbs. (>81 .65kg)
Cut Through Resistance	>40 lbs. (>18.14kg) with .005in (0.127mm) blade
Abrasion Resistance	60 cycles per UL 719
Connector	4 pin, 0.96in (24.38mm) diameter
Operating Environment	
Temperature	32° to 167°F (0° to 75°C)
Humidity	5% to 95% RH, non-condensing
Altitude	15,000ft (4,572m) max.
Storage Environment	-22° to 185°F (-30° to 85°C)
Dimensions	Diameter of cable not to exceed 0.25in (6.35mm)
NSC-10	10ft (3.05m)
NSC-25	25ft (7.62m)
NSC-50	50ft (15.24m)
NSC-100	100ft (30.48m)
NSC-CL-xx	Custom Lengths (available upon request)
Weight	.02 lbs./ft (29.74g/m)
Certifications	UL STD; RoHS compliant



Cable Detail

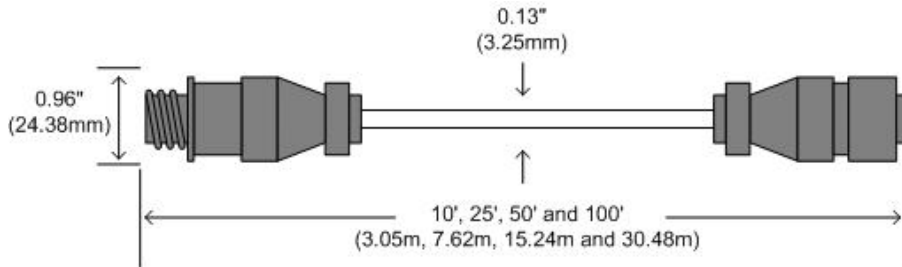

FORT COLLINS CO
970 484-6510
970 484-6650 FAX
WWW.RLETECH.COM

©2008 RLE Technologies 110025 Rev 1.2 (07/2008)



Although the information contained in this document is believed to be accurate and correct, RLE Technologies assumes no responsibility, and disclaims all liability, for any damages resulting from the use of this information or any error or omission in this document. RLE Technologies does not warrant, guarantee, or make any representations as to the performance, fitness for use, safety, or reliability of any existing or future wiring, equipment, additions or modifications to equipment, or any other component of the original or modified system. Specifications are subject to change without notice.